

CONDUIT PRODUCT Offerings



Super Vac-U-Flex®

TEMPERATURE RANGE: -20° F to -150° F

CONSTRUCTION: High strength fiber-reinforced PVC hose cover bonded to coated spring steel wire helix

COLOR: Gray

STANDARD LENGTHS: 25' & 50'

DIAMETERS: 1.25", 1.5", 2", 2.5", 3", 4", 5", 6"

FEATURES/BENEFITS:

- Core Products
- Cuffed Ends
- Moisture Resistant
- Oil Resistant
- UV Resistant
- Ozone Resistant



ARH

TEMPERATURE RANGE: -60° F to 275° F

CONSTRUCTION: Thermoplastic rubber with an external polypropylene wearstrip


COLOR: Black with gray helix

STANDARD LENGTHS: 25' & 50'

DIAMETERS: 0.75", 1", 1.25", 1.5", 2", 2.5", 3", 4", 6", 8"

FEATURES/BENEFITS:

- Abrasion Resistant
- Chemical Resistant
- Core Products
- Drag Resistant
- Moisture Resistant
- UV Resistant
- Ozone Resistant

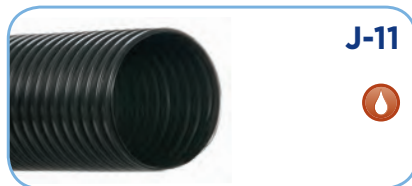

J-11

TEMPERATURE RANGE: -30° F to 160° F

CONSTRUCTION: All polyethylene hose

COLOR: Black

STANDARD LENGTHS: 25' & 50'

DIAMETERS: 0.75", 1", 1.25", 1.5", 2", 2.25", 2.5", 3", 3.5", 4", 5"

FEATURES/BENEFITS:

- Moisture Resistant

CORE PRODUCTS

CHEMICAL-RESISTANT

DRAG RESISTANT

OIL RESISTANT

UV RESISTANT

ABRASION-RESISTANT

CUFFS AVAILABLE

MOISTURE-RESISTANT

OZONE-RESISTANT





Flexible Hose & Ducting

528 Carwellyn Road
Abbeville, SC 29620

1177 Markley Drive
Plymouth, IN 46563

615 South 56th Avenue
Phoenix, AZ 85043

4610 Eastgate Parkway, Unit 3
Mississauga, Ontario
Canada L4W 3W6

For more information visit www.hitechduravent.com
Call us at 800.348.6500 (USA) | 800.263.3359 (CANADA)
Fax us at 800.348.6599
Email us at sales@hitechduravent.com